


**INTRODUCTION ELRO PRO Keypad Control AP55KE11:**


The ELRO PRO Keypad Control AP55KE11 is designed for use with the ELRO 10-ZONE PRO ALARM SYSTEM AP5500. The PRO Keypad Control is used to Arm, Part-Arm and Disarm the system, or give a panic alarm, by using a four digit User Access Code.

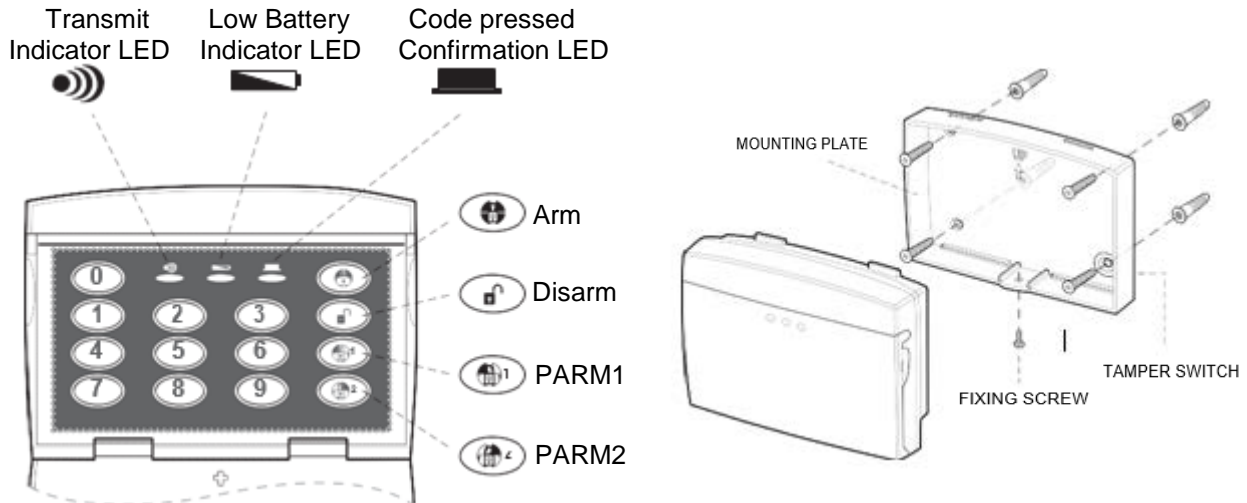

**Installing and Configuring (put in Housecode) of the PRO Keypad Control:**

First step is to put your Alarm Panel in the Installation modus. Press, ? ? ? ? (???? standard Master Password), display show 1.USER SETUP.

Remove the fixing screw from the bottom edge of the PRO Keypad Control, and remove the mounting plate. Use the mounting plate to mark the holes to drill. Fix the mounting plate with provided wall plugs and screws.

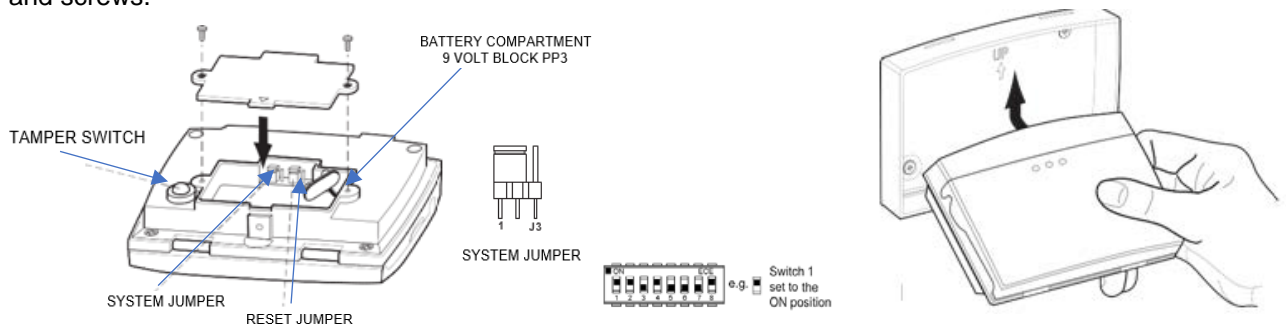




Check if system jumper like on figure. In order to prevent unauthorised use you must configure your PRO Keypad Control. Because of security reasons this is not done by eight DIP switches like on the figure above. To configure the house code first check your house code of the Alarm Panel and other sensors. If the house is like above: 1-ON, 2-ON, 3-OFF, 4-ON, 5-OFF, 6-OFF, 7-OFF and 8-ON. We configure the code (of all the ON-positions) as the house code for the PRO Keypad Control: 1-2-4-8. Now press on the PRO Keypad Control, followed by 1 2 3 4 (this is the standard code of the PRO Keypad Control!) and again; the will illuminate and flash twice. Press now your house code, followed by the will illuminate and flashes three times to confirm the setting.


**Next IMPORTANT step is to change the User Access Code:**




Press, followed by the standard code 1234 and , the will illuminate once and flash twice. Enter now your NEW Access Code : ? ? ? ? and the will illuminate once and flash three times, to confirm setting. Change now the Installation modus of the Alarm Panel to Disarm Ready modus, by pressing .

**Now we will test the PRO Keypad Control, and check the operating:**


Arm (full) the system: Press, ???? (your user access code) and 

Partial Arm: Press, ???? (your user access code) and  or 


Disarm: Press, ???? (your user access code) and 


All these action will be confirmed:  will illuminate and  will flash green to confirm transmission. Always check if the  flashed!

**Panic Alarm:**

Press and hold the PARM1 and PARM2 together more than 2 seconds until  flashes rapidly.

**Disabling the PRO Keypad Control:**

If a sequence of more than 16 incorrect key presses is entered, the Keypad will be disabled for 1 minute. If consecutively disabled 3 times, the Keypad will emit a Tamper signal to the control panel with  LED flashing slowly.

**Note:** When the Keypad is disabled for 1 minute, the  LED will flash slowly, indicating that the Keypad is shut down temporarily. During this 1 minute, any key presses will be treated as invalid pressing. After the elapse of 1 minute, correct inputting will be accepted.

For more information about the ELRO 10-ZONE PRO ALARM SYSTEM AP5500 visit [www.elro.eu](http://www.elro.eu)

ELRO Europe  
Postbus 9607 - Box E800  
1006 GC Amsterdam  
The Netherlands



**GUARANTEE**  
[www.elro.eu](http://www.elro.eu)

**V1**

**Symbols:** Recycling and disposal: The WEEE symbol means that this product and batteries must be disposed separately from other household waste. When it reaches its end of life, take it to a designated waste collection point in your area to guarantee a safe disposal or recycling. Protect the environment, human health and natural resources!

