


INTRODUCTION ELRO PRO Door/window sensor AP55MA11:

The ELRO Pro Door/window sensor AP55MA11 is designed for use with the ELRO 10-ZONE PRO ALARM SYSTEM AP5500. The Magnetic sensor consists of two parts; a Detector and a Magnet. They are designed to be fitted to doors or windows with the Magnet mounted on the moving/opening part.

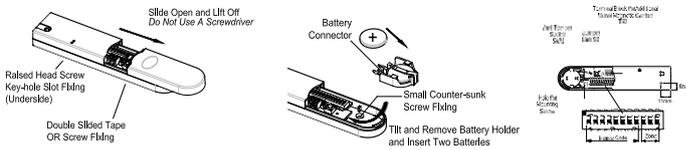

Open the sensor, take out the battery connector, and place the battery! Check the house code; same as PIR and Remote Dip 1-8 from 1-12. Select the Zone you want: setting Dip 9-11 according the overview below. Mark the Zone number on the magnet.

Mounting the PRO door/window sensor:

Decide which doors/windows are to be protected by fitting Magnetic Contact Sensors, (usually the front and back doors. Additional sensors may also be fitted where required to other vulnerable doors or windows, (e.g. garage, patio/conservatory doors etc). Ensure that the position selected for the Magnetic Contact detector is within effective range of the Control Panel, (refer to 'Testing the Control Panel & Remote Control'). Remove the battery holder, and mount the detector using either the adhesive tape or screws. Fit the Magnet to the moving part of the door/window opposite the Detector. Ensure that the parallel gap between the Magnet and Sensor is less than 10 mm and that the arrow on the Magnet is pointing towards and aligned with the mark on.

	DIP 9	DIP 10	DIP 11
Zone 1	OFF	OFF	OFF
Zone 2	OFF	OFF	ON
Zone 3	OFF	ON	OFF
Zone 4	OFF	ON	ON
Zone 5	ON	OFF	OFF
Zone 6	ON	OFF	ON



Programming the Alarm Panel:

Press , ? ? ? ? (???? standard Master Password), display show 1.USER SETUP.

1. USER SETUP. Press ,until in display: 3. ZONE SETTING. No we can choose:

Zone Setup (Z1-10) ; fill in the Zone Number you defined in door/window sensor!

Name	No Name	You can select a room name, or leave 'no name'
Type	Intruder	Normal sensor will be 'intruder'.
Final Exit	OFF	'OFF'
Chime	OFF	'OFF'
Entry Delay Zone 1	ON, 30s	Depends if you have to pass the when you leave, or come back!
Zone 2-10	OFF	
Part-Arm 1	OFF	Do you want switch this sensor on in PARM1
Part-Arm 2	OFF	Do you want switch this sensor on in PARM2
Walk Through	OFF	'OFF'

After setting we leave the program modus: press you see in the display: DISARM READY

For more information about the ELRO 10-ZONE PRO ALARM SYSTEM AP5500 visit www.elro.eu

ELRO Europe
Postbus 9607 - Box E800
1006 GC Amsterdam
The Netherlands



V1

Symbols: Recycling and disposal: The WEEE symbol means that this product and batteries must be disposed separately from other household waste. When it reaches its end of life, take it to a designated waste collection point in your area to guarantee a safe disposal or recycling. Protect the environment, human health and natural resources!

