



INTRODUCTION ELRO PRO Remote Control AP55RE11:

The ELRO Pro Remote Control AP55RE11 is designed for use with the ELRO 10-ZONE PRO ALARM SYSTEM AP5500. The Remote Control is used to Arm, Part-Arm and Disarm the system, or give a panic alarm.

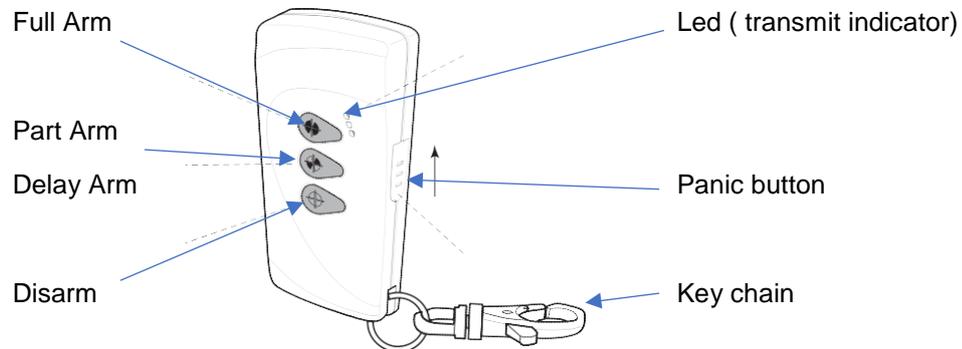

The Remote Control incorporates a Personal Attack Switch (Panic). Activating the Panic Alarm will immediately initiate a Full Alarm condition whether the system is Armed or Disarmed, (unless the system is in Service, Test or Program mode).

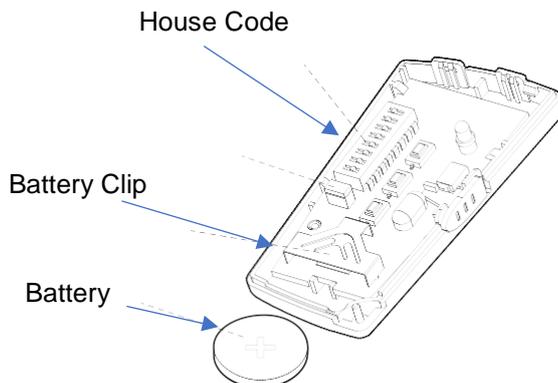

Insert the 3V (CR2032) battery. Check the house code of your system and put this also into the remote (same as in the door/window magnet and the PIR). Before you open a door/window magnet or a PIR change the Disarm ready modus of the Alarm Panel to Installation modus:

Press,  display: 1-1 USER 1 SETUP. Now you can check the code in one of the sensors or, Press,  display: 2.SYTEM SETTING. Go to House Code: You will see 8 digits, only 0 and 1 are shown. 0 means OFF, and 1 means ON. Close the opened sensor, and remote.

Go back to Disarm ready mode on the Alarm Panel, Press,  until display; Disarm Ready.

Now you can test the remote by pushing the Full Arm. When Alarm Panel reacts, Push the disarm button, to avoid alarm. If you want to arm in the PARM1 modus prese the Part Arm button one time, if you want to arm in the PARM2 modus, press the Part Arm a second time!

For more information about the ELRO 10-ZONE PRO ALARM SYSTEM AP5500 visit www.elro.eu

